




- Annealed Heads
- H-13 Steel 40-45 R/C core for toughness
- Nitrided surface for smooth non-galling operation
- Reduce fitting time with a precision tolerance diameter

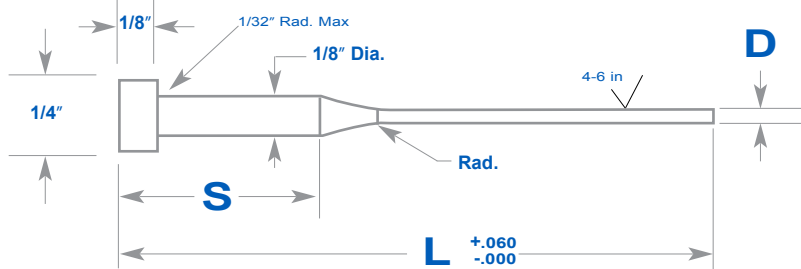

*OS = Oversize .005 on (D) Pin Diameter*

Pin Dia	Actual Size	Step Length	OAL	Catalog Number	List Price
D	+ .0000 - .0004	S	L		
3/64	.0464	1/2" Shoulder	6.00	ST0460506	5.09
			10.00	ST0460510	5.67
			10.00	ST0460510OS	6.20
			14.00	ST0460514	7.25
	.0464	2" Shoulder	6.00	ST0462006	4.78
			10.00	ST0462010	5.72
			10.00	ST0462010OS	6.46
			14.00	ST0462014	7.04
1/16	.0621	1/2" Shoulder	6.00	ST0620506	4.67
			10.00	ST0620510	5.83
			10.00	ST0620510OS	6.67
			14.00	ST0620514	6.83
	.0621	2" Shoulder	6.00	ST0622006	4.57
			10.00	ST0622010	5.36
			10.00	ST0622010OS	6.46
			14.00	ST0622014	7.35
.0671					

Prices subject to change without notice

Pin Dia	Actual Size	Step Length	OAL	Catalog Number	List Price
D	+ .0000 - .0004	S	L		
5/64	.0777	1/2" Shoulder	6.00	ST0780506	4.67
			10.00	ST0780510	5.83
			10.00	ST0780510OS	6.77
			14.00	ST0780514	6.83
	.0777	2" Shoulder	6.00	ST0782006	4.57
			10.00	ST0782010	5.36
			10.00	ST0782010OS	6.04
			14.00	ST0782014	7.35
3/32	.0933	1/2" Shoulder	6.00	ST0930506	4.25
			10.00	ST0930510	5.41
			10.00	ST0930510OS	6.04
			14.00	ST0930514	6.51
	.0933	2" Shoulder	6.00	ST0932006	4.04
			10.00	ST0932010	5.15
			10.00	ST0932010OS	5.83
			14.00	ST0932014	6.88
7/64	.1089	1/2" Shoulder	6.00	ST1090506	4.25
			10.00	ST1090510	5.41
			14.00	ST1090514	6.51
	.1089	2" Shoulder	6.00	ST1092006	4.10
			10.00	ST1092010	4.78
			14.00	ST1092014	6.88