


- Orientation slot provided
- A leak-free seal, up to 600 psi
- Exact tolerances for improved flow performance
- Dependable brazed SOLID BRASS construction

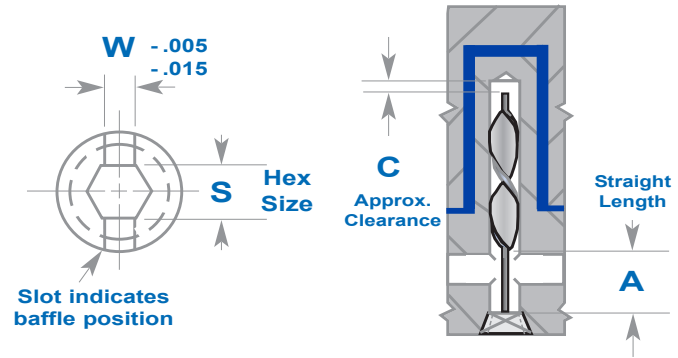

Plug NPT	Hex Size	Length	Baffle Thick	Baffle Width	Drill Size	Clear	Straight Length	Catalog Number	Price
P	S	L	T	W	D	C	H		
1/16	5/32	4	1/16	1/4	1/4	.10	2	TWB00604	\$4.20
1/16	5/32	8	1/16	1/4	1/4	.10	4	TWB00608	\$4.23
1/8	3/16	4	1/16	5/16	5/16	.12	2	TWB01204	\$4.20
1/8	3/16	8	1/16	5/16	5/16	.12	4	TWB01208	\$4.70
1/4	1/4	5	3/32	7/16	7/16	.17	2	TWB02505	\$5.20
1/4	1/4	10	3/32	7/16	7/16	.17	4	TWB02510	\$5.90
3/8	5/16	6	3/32	9/16	9/16	.21	2	TWB03706	\$6.90
3/8	5/16	12	3/32	9/16	9/16	.21	4	TWB03712	\$7.50
1/2	3/8	8	3/32	11/16	11/16	.26	3	TWB05008	\$7.50
1/2	3/8	16	3/32	11/16	11/16	.26	5	TWB05016	\$8.50
3/4	9/16	12	1/8	15/16	15/16	.35	4	TWB07512	\$12.00
3/4	9/16	20	1/8	15/16	15/16	.35	6	TWB07520	\$14.00
1	5/8	16	1/8	1-1/8	1-1/8	.42	5	TWB10016	\$23.40
1	5/8	24	1/8	1-1/8	1-1/8	.42	8	TWB10024	\$27.40

Prices subject to change without notice