




M-2 STEEL 58-60 R/C

THRU HARDENED EJECTOR PINS

Advantages of Choice Thru-Hardened Ejector Pin

- M-2 Steel stays hard to 60 RC in applications up to 1200 Degree F
- Eliminate annealing in applications above 300 Degrees F as found in other thru-hardened pins
- Eliminate wear and galling due to carbon-bonding
- Special material properties create 100% better surface finishes than comparable pins when ground
- Eliminate extra polishing after grinding special form work
- 2 to 5 micro-inch finish is standard - eliminating galling, reducing wear on pins & mold cavities and eliminating chipping
- Tolerance of .0003" on the diameter is equivalent to gage pin tolerances
- Heads are annealed for easy keying and special machining
- All of Choice thru-hardened pins are marked with part number
- Pins can be coated with any coating available
- Special size pins can be easily ground to your specifications

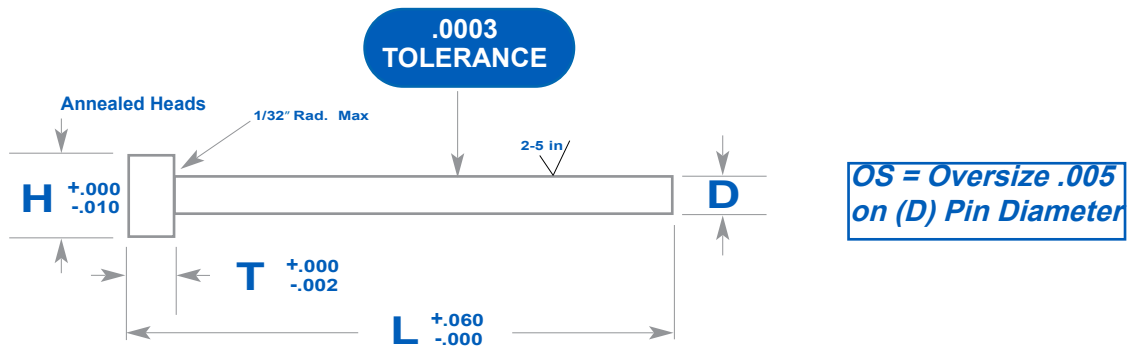

Pin Dia	Actual Size	Head Dia	Head Thick	Overall Length	Catalog Number	List Price
D	+ .0000 - .0003	H	T	L		
1/32	.0307	1/4	1/8	6.00	XP03106	10.92
	.0357			6.00	XP03106OS	12.13
3/64	.0463	1/4	1/8	6.00	XP04606	7.28
	.0513			6.00	XP04606OS	8.25
1/16	.0620	1/4	1/8	6.00	XP06206	6.07
	.0670			6.00	XP06206OS	7.00
	.0620			10.00	XP06210	9.70
	.0670			10.00	XP06210OS	10.92
5/64	.0776	1/4	1/8	6.00	XP07806	5.76
	.0826			6.00	XP07806OS	6.50
	.0776			10.00	XP07810	10.14
	.0826			10.00	XP07810OS	11.36
3/32	.0932	1/4	1/8	6.00	XP09306	5.46
	.0982			6.00	XP09306OS	6.46
	.0932			10.00	XP09310	8.49
	.0982			10.00	XP09310OS	9.70
7/64	.1088	1/4	1/8	6.00	XP10906	5.16
	.1138			6.00	XP10906OS	6.10
	.1088			10.00	XP10910	8.19
	.1138			10.00	XP10910OS	9.09

Pin Dia	Actual Size	Head Dia	Head Thick	Overall Length	Catalog Number	List Price
D	+ .0000 - .0003	H	T	L		
1/8	.1245	1/4	1/8	6.00	XP12506	4.24
	.1295			6.00	XP12506OS	5.10
	.1245			10.00	XP12510	7.89
	.1295			10.00	XP12510OS	8.80
9/64	.1245	1/4	1/8	14.00	XP12514	10.92
	.1295			14.00	XP12514OS	12.74
	.1401			6.00	XP14006	4.56
	.1451			6.00	XP14006OS	5.50
5/32	.1401	9/32	5/32	10.00	XP14010	8.19
	.1451			10.00	XP14010OS	9.09
	.1401			14.00	XP14014	12.43
	.1451			14.00	XP14014OS	13.35
5/32	.1557	9/32	5/32	6.00	XP15606	4.56
	.1607			6.00	XP15606OS	5.25
	.1557			10.00	XP15610	8.82
	.1607			10.00	XP15610OS	9.90
5/32	.1557	9/32	5/32	14.00	XP15614	13.23
	.1607			14.00	XP15614OS	14.15

Prices subject to change without notice



Phone: 800-425-3171

world@choicemold.com

Fax: 800-425-3177



M-2 STEEL 58-60 R/C

THRU HARDENED EJECTOR PINS

Pin Dia	Actual Size	Head Dia	Head Thick	Overall Length	Catalog Number	List Price
D	+0.0000 -0.0003	H	T	L		
11/64	.1713	11/32	3/16	6.00	XP17106	5.46
	.1763			6.00	XP17106OS	6.40
	.1713			10.00	XP17110	9.41
	.1763			10.00	XP17110OS	10.30
	.1713			14.00	XP17114	13.65
	.1763			14.00	XP17114OS	14.65
3/16	.1870	3/8	3/16	6.00	XP18706	5.46
	.1920			6.00	XP18706OS	6.70
	.1870			10.00	XP18710	10.01
	.1920			10.00	XP18710OS	11.01
	.1870			14.00	XP18714	13.94
	.1920			14.00	XP18714OS	15.16
13/64	.2026	3/8	3/16	6.00	XP20306	6.37
	.2076			6.00	XP20306OS	7.89
	.2026			10.00	XP20310	11.22
	.2076			10.00	XP20310OS	12.30
	.2026			14.00	XP20314	15.47
	.2076			14.00	XP20314OS	16.98
7/32	.2182	13/32	3/16	6.00	XP21806	5.76
	.2232			6.00	XP21806OS	7.28
	.2182			10.00	XP21810	10.62
	.2232			10.00	XP21810OS	11.83
	.2182			14.00	XP21814	16.37
	.2232			14.00	XP21814OS	18.20
15/64	.2338	13/32	3/16	6.00	XP23406	6.37
	.2388			6.00	XP23406OS	7.58
	.2338			10.00	XP23410	10.62
	.2388			10.00	XP23410OS	12.08
	.2338			14.00	XP23414	16.98
	.2388			14.00	XP23414OS	18.00
1/4	.2495	7/16	3/16	6.00	XP25006	6.98
	.2545			6.00	XP25006OS	8.19
	.2495			10.00	XP25010	11.22
	.2545			10.00	XP25010OS	12.74
	.2495			14.00	XP25014	17.59
	.2545			14.00	XP25014OS	19.40
17/64	.2651	7/16	1/4	6.00	XP26506	7.28
	.2651			10.00	XP26510	11.52
	.2701			10.00	XP26510OS	13.04
	.2651			14.00	XP26514	17.89
	.2701			14.00	XP26514OS	20.32

Pin Dia	Actual Size	Head Dia	Head Thick	Overall Length	Catalog Number	List Price
D	+0.0000 -0.0003	H	T	L		
9/32	.2807	7/16	1/4	6.00	XP28106	9.41
	.2857			6.00	XP28106OS	10.90
	.2807			10.00	XP28110	16.98
	.2857			10.00	XP28110OS	18.33
	.2807			14.00	XP28114	22.44
	.2857			14.00	XP28114OS	25.47
19/64	.2963	1/2	1/4	6.00	XP29606	10.31
	.2963			10.00	XP29610	16.68
	.3013			10.00	XP29610OS	18.20
	.2963			14.00	XP29614	23.35
	.3013			14.00	XP29614OS	26.68
	5/16			.3120	1/2	1/4
.3170		6.00	XP31206OS	12.13		
.3120		10.00	XP31210	16.98		
.3170		10.00	XP31210OS	18.80		
.3120		14.00	XP31214	24.86		
.3170		14.00	XP31214OS	27.90		
21/64	.3276	9/16	1/4	6.00	XP32806	11.22
	.3326			6.00	XP32806OS	12.43
	.3276			10.00	XP32810	17.28
	.3326			10.00	XP32810OS	19.11
	.3276			14.00	XP32814	26.68
	.3326			14.00	XP32814OS	30.32
11/32	.3432	9/16	1/4	6.00	XP34306	11.52
	.3482			6.00	XP34306OS	12.74
	.3432			10.00	XP34310	18.20
	.3482			10.00	XP34310OS	29.45
	.3432			14.00	XP34314	27.29
	.3482			14.00	XP34314OS	30.92
23/64	.3588	5/8	1/4	6.00	XP35906	12.13
	.3588			10.00	XP35910	18.80
	.3638			10.00	XP35910OS	20.62
	.3588			14.00	XP35914	27.90
	.3638			14.00	XP35914OS	31.53
	3/8			.3745	5/8	1/4
.3795		6.00	XP37506OS	14.26		
.3745		10.00	XP37510	22.84		
.3795		10.00	XP37510OS	25.15		
.3745		14.00	XP37514	29.11		
.3795		14.00	XP37514OS	32.14		
1/2	.4995	3/4	1/4	6.00	XP50006	26.46
	.4995			10.00	XP50010	44.10

Prices subject to change without notice



Phone: 800-425-3171

world@choicemold.com

Fax: 800-425-3177